

Dehumidification Fresh Ventilation System

MIA · XF | MIA · D

Fresh Air Dehumidification Ventilation Series





high speed
external motor

europaean standard
H13 high efficiency
≥99.97%

use HITACHI
& Panasonic
compressor

support RS485

fresh air
dehumidify

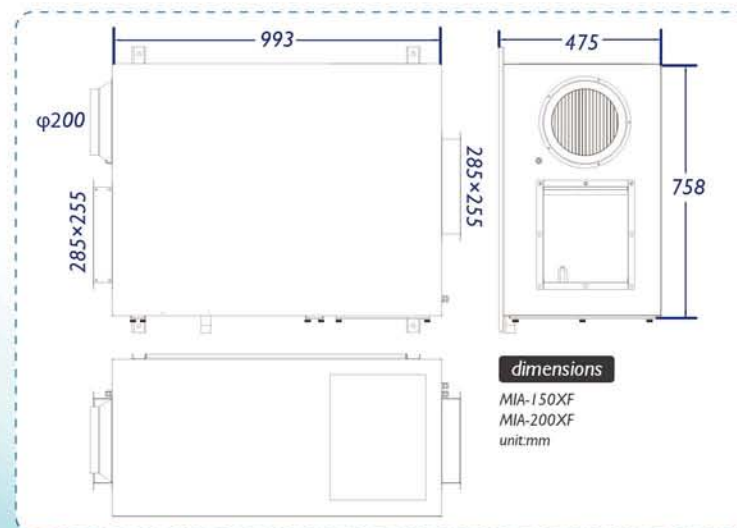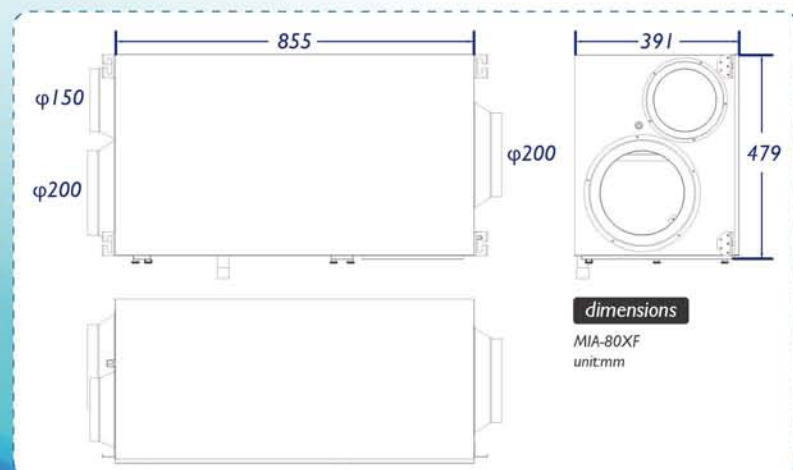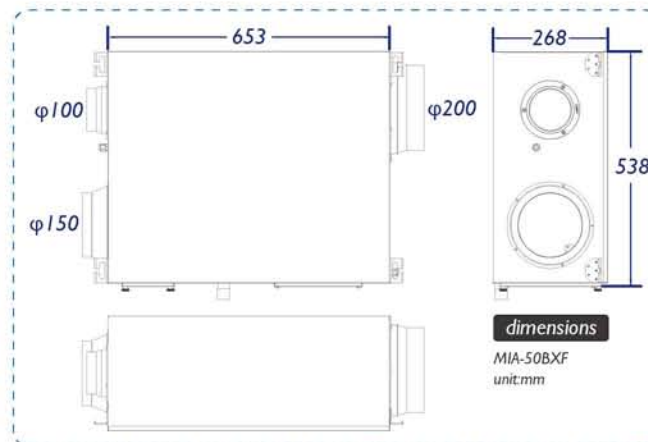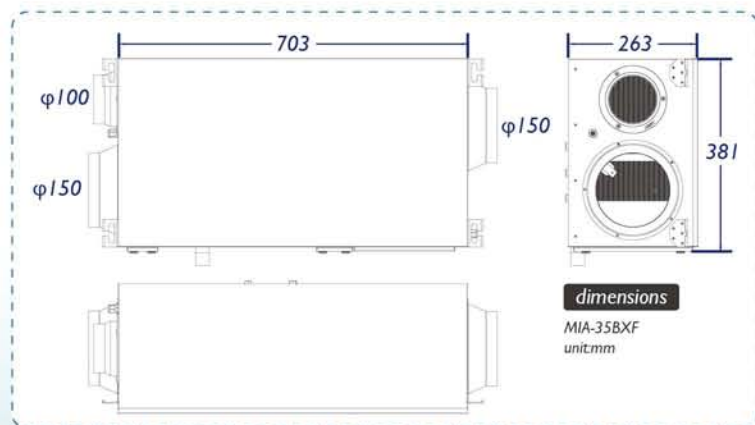

Technical Parameters

Model	Voltage	Power	Volume	Pressure	Dehumidification	Applicable area	Air volume	External Dimensions	Weight
MIA-35BXF	220V	380W	350m³/h	185Pa	35L/D	30~60m²	0~150m³/h	703×381×263mm	30kg
MIA-50BXF	220V	585W	500m³/h	220Pa	60L/D	60~100m²	0~180m³/h	653×538×268mm	40kg
MIA-80XF	220V	960W	800m³/h	165Pa	85L/D	100~180m²	0~250m³/h	855×479×391mm	54kg
MIA-150XF	220V	2400W	1500m³/h	170Pa	200L/D	300~500m²	0~500m³/h	993×758×475mm	80kg
MIA-200XF	220V	2486W	2000m³/h	185Pa	220L/D	400~600m²	0~650m³/h	993×758×475mm	83kg